


Technical Data Sheet



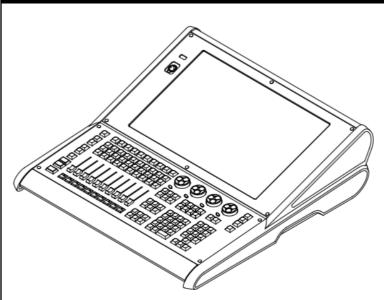

Road Hog 4 Lighting Control Console

- Operating System: Hog 4 OS (Linux Kernel)
- Built in DMX Processor 8000
- Oversized Built-In Touchscreen
- Built-in Kensington Security Lock
- Desk light included
- Light Converse Visualizer dongle included
- Dust cover included
- Custom Road Case Available

CONTROL SURFACE:

Playback Faders: 10, manual

GrandMaster: shared with playback fader 1

Encoder Wheels: 4 with dedicated function buttons

Function Keys: 12

KeyBoard: Support for external USB keyboard Trackball: external USB trackball support Desklight: 1, dimmable blue and white LEDs

Worklight: Yes, d<mark>immable</mark> white LED
Ventlight: Yes, dimmable blue LED

ELECTRICAL

Voltage: 100-240VAC, 50 / 60Hz

Max Current: 5A

Mains Connector: IEC 320

PHYSICAL

Weight: 38.6 lbs (17.5 kg)

Dimensions: 26.7" (678.18mm) wide 27.61" (701.32mm) deep

8.10" (205.8mm) high

DISPLAYS

Internal: One 22" widescreen touchscreen

(10 point multi-touch)

External: Support for one monitor / touchscreen (DVI-D or VGA - only one can be used at a time)

(see Hog4OS manual for list of supported touchscreens)

DMX / ARTNET / SCAN

Local Output Processing: 8 universes (4,096 ch)
Local DMX Outputs: 4 x Neutrik 5-pin female XLR
Expansion via external DP8000s: Yes, Unlimited

I/O CONNECTIVITY

USB 2.0 Ports: 2 rear, 1 front

USB 3.0 Ports: 2 rear

HogNet: Yes (allows connectivity to other consoles)
MIDI: Support for external USB Midi class devices
(supports MIDI Show Control, MIDI Timecode, and MIDI Notes)
LTC Input: Requires separate USB LTC Widget
FixtureNet: Yes (Art-Net, sACN, Visualizer connect)
Visualizer connectivity: FixtureNet / Art-Net / sACN

(list of supported visualizers in Hog 4 OS help manual)

Remote Focus: Yes, via Open Sound Control

COMPUTER

Motherboard: Advantech AIMB-581 CPU: Intel Pentium G850 2.9 GHz

Memory: 4 GB

Internal Hard Drive: 32 GB SSD Internal CD-R/DVD-ROM: No

